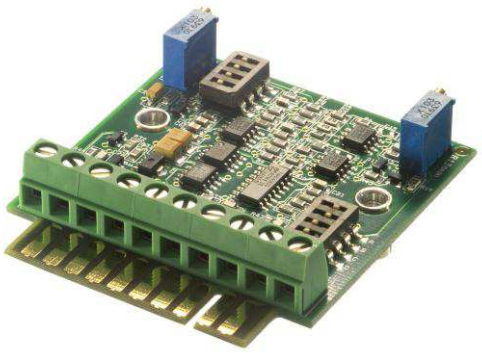


RoHS

LVM-110

Voltage Output
LVDT/RVDT OEM Signal Conditioner

SPECIFICATIONS

- **Low cost OEM signal conditioner**
- **Very compact, open PC board design**
- **Multiple unipolar and bipolar output options**
- **DIP switch selectable gain and excitation**
- **2.5, 5, 8 and 10kHz excitation frequencies**
- **Zero and span adjustment potentiometers**
- **Master/slave capability**
- **Card-edge or barrier strip connections**
- **Works with very low input impedance LVDTs and RVDTs**

FEATURES

- Low cost/high performance
- 3-pole Butterworth filter
- DIP switch selectable gain, output and LVDT excitation frequency
- 20-turn zero suppression & span potentiometers

APPLICATIONS

- Position feedback systems
- High density dimensional gaging
- Space restrictive installations
- Testing systems
- Integration into OEM machines

The **LVM-110** is a full-featured LVDT/RVDT signal conditioner that offers excellent performance on a budget. Operating on either a ±12 or ±15VDC supply voltage, the LVM-110 delivers a full range of selectable unipolar and bipolar, low noise DC voltage outputs.

Designed to be compatible with most LVDT and RVDT transducers, the LVM-110 will operate with 5 and 6 electrical connection devices. This versatility is due to the wide variety of selectable excitation frequencies, and a generous excitation drive current of 20mA, allowing operation with transducer input impedances as low as 150 Ohms. The master/slave function (DIP switch selectable) allows synchronization of multiple conditioners to prevent beat frequencies and cross talk between transducers. The need for phase correction adjustment is eliminated thanks to demodulation synchronized to the sum of the LVDT/RVDT outputs.

The LVM-110 is designed for easy installation, plugged into a backplane-type connector, or with individual wires connected to the screw terminal barrier strip. Measuring less than 2.5x2.5 inches, it can be mounted or stacked using the permanently attached threaded standoffs, or card-edge guides. All selectable operating parameters are easily accessed via two DIP switches, simplifying the gain, frequency and output setup procedure.


PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS	
Supply voltage	±12VDC or ±15VDC, ±10% *(Note; ±15VDC required for ±10VDC output)*
Supply current	±50mA maximum
Output voltage ranges	±5VDC, ±10VDC, 0 to +5VDC, 0 to +10VDC *(DIP switch selectable)*
Temperature coefficient of output	±0.02% of FSO per ºF [±0.036% of FSO per ºC] over operating temperature range
Output current	5mA maximum
Output noise and ripple	15mV RMS maximum
Output impedance	1Ω maximum
Frequency response	250Hz @ -3 dB (3-pole Butterworth filter)
Non-linearity	±0.05% of FSO maximum
Stability	±0.05% of FSO maximum (after 15 minute warm-up)
Zero suppression	±6VDC total
Transducer excitation	
Voltage	3VRMS ±10%, sine wave
Current	20mA RMS maximum
Frequency	2.5, 5, 8 or 10KHz *(DIP switch selectable)*
Transducer requirements	
Transducer type	LVDT or RVDT with 5 or 6 electrical connections
LVDT/RVDT input impedance	150Ω minimum
LVDT/RVDT output range	0.1 to 5.6 VRMS for ±10VDC signal conditioner output


ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS	
Operating temperature range	30°F to +130°F [-1°C to 55°C]
Storage temperature range	-40°F to +257°F [-40°C to 125°C]
Zero and gain adjustments	20-turn potentiometers
Electrical connections	PC board edge (to backplane-type connector) or barrier terminal strip (accepts AWG 14 to 30 wire sizes)
Mounting	Use the attached threaded standoffs or card-edge guides

Notes:
All values are nominal unless otherwise noted
FSO (Full Scale Output) is the largest absolute value of the outputs measured at the range ends

WIRING SCHEMATIC

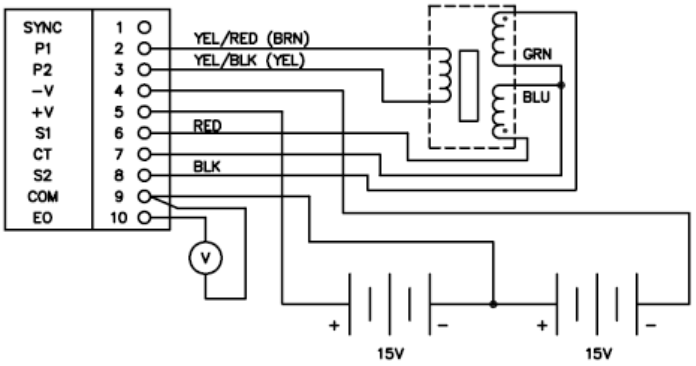

DIMENSIONS

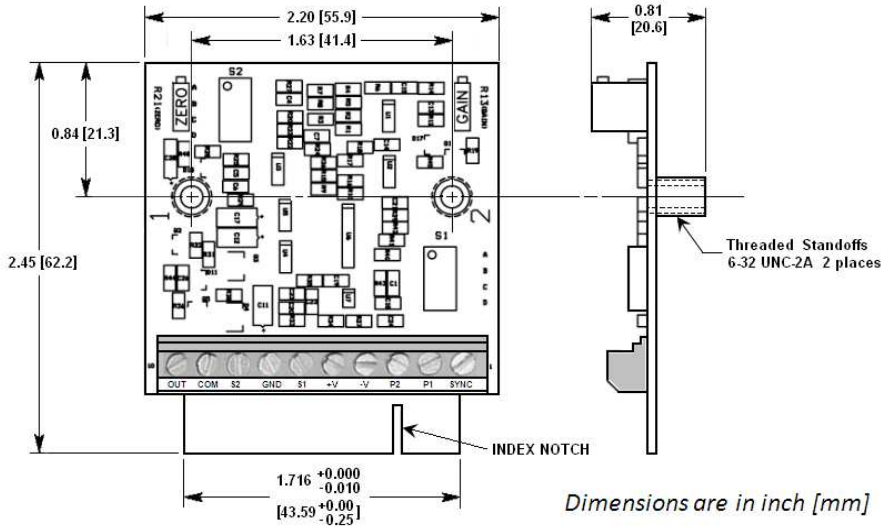

ORDERING INFORMATION

Description	Model	Part Number
LVDT/RVDT Voltage Output, OEM Signal Conditioner	LVM-110	04171776-000
Dual rail DC power supply (±15VDC)	PSD 40-15	02291339-000
Mating Connector *(sold separately)*	CINCH 5010A-20 PCB EDGE 1	62105012-000
Cable to connect HCA/HCI/GCA/R36AS to LVM-110 *(1)*	PTO6A-10-6S to Stripped & Tinned	04290417-000
Extension cable to connect LBB (option -001) to LVM-110 *(1)*	PTO6A-10-6S to Stripped & Tinned	04290582-000

(1) All cables are shielded, 10 foot long, and rated 80°C [176°F]. Consult factory for other lengths.

ASIA

ABOUT MACRO SENSORS

Macro Sensors, founded by Howard A. Schaevitz, has more than three hundred man-years of experience in just one thing: the design and manufacture of LVDTs. We believe that you need solutions, not simply products. When you call us, you get the benefit of our experience and our commitment.

Most products listed are in stock for immediate delivery, and we strive to offer the finest customer service in the industry: technical support from people who understand LVDTs and how to apply them to your benefit, and a commitment to excellent pricing, quality products, and deliveries that you can truly rely on. Macro Sensors also has a comprehensive network of representatives and distributors in the U.S. and around the world to provide you with local support.

We manufacture an enormous array of LVDTs, from modified standards to complete custom designs. Our customers consistently tell us it is Macro Sensors? quality and service that keeps them coming back. Let our experience go to work for you.

Macro Sensors · 7300 U.S. Route 130 North, Bldg. 22, Pennsauken, NJ 08110-1541 USA
© Macro Sensors. All Rights Reserved.