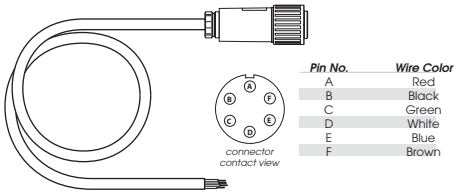




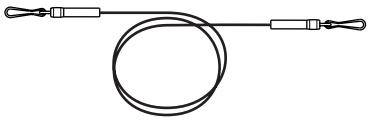
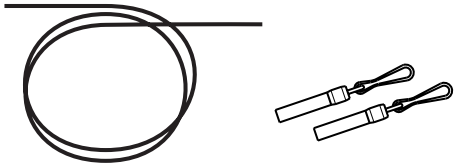

Accessories

Electrical Interconnect Cable Assembly	*specifications*	*transducer series*	*order number*
	6-pin plug with 15-ft. long 6-conductor shelded 24 AWG multiconductor cable. Mates to any of our position sensors with the 6-pin connector option. Available with either plastic or metal connector.	PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000	9603513-0015 (plastic connector) 9603924-0015 (metal connector)
6-pin 90º Mating Plug			
	6-pin, 90-degree metal mating plug. Mates to any of our position sensors with the 6-pin connector option.	PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000	9036810-0018
6-Pin Plastic Mating Plug			
	6-pin, plastic mating plug. Mates to any of our position sensors with the 6-pin plastic connector option.	PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000	9036830-0001
6-Pin Metal Mating Plug			
	6-pin, metal mating plug. Mates to any of our position sensors with the 6-pin metal connector option.	PT1, PT100, PT5, PT8000, PT9000, RT8000, RT9000, IT9000	9036810-0001
18-Pin Plastic Mating Plug			
	18-pin, plastic mating plug. mates to encoder based position sensors with18-pin connector option.	DPT250, PT5E, PT8150 and PT9150 only. Used for Line Driver Option w/Index Channels	9036820-0003
Extension / Leader Cable Assemblies		*description*	
	Extension cable enables the position transducer to be mounted away from the range of measurement. XXXX = length in inches (example: 0025 = 25 in)	.019-inch nylon-coated stainless steel cable assembly	9603969-XXXX
		.034-inch nylon-coated stainless steel cable assembly	9603740-XXXX
		.047-inch nylon-coated stainless steel cable assembly	9603965-XXXX
Leader Cable and Hardware Kit		*description*	*order number*
		Bare .047-in. dia. stainless steel cable for making your own leader cable. *(sold by the foot)*	9000154-0047
		cable-end hardware kit *(includes 2 ea: swivel, clip,snubber)*	9610005-0005

celesco
Celesco Transducer Products, Inc.
20630 Plummer Street • Chatsworth, CA 91311
tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

Measuring Cable Crimping Tool			
Used when making your own measuring cables. Sized perfectly for crimps provided in measuring cable hardware kits.		measuring cable crimping tool	9610035-0000
Spring Winding Tool	*description*		
	PT8000 Spring Winding Tool		9610018-0000
	PT8600 Spring Winding Tool		9610031-0000
	PT9000 and PT9600 Spring Winding Tool		9610021-0000
Underwater Testing			
Recommended for Underwater Applications	Celesco will pressure test and certify transducer for water tightness. Transducer is subjected to an elevated air pressure of 55 psia for 2 hours and monitored for internal seal failure. For extreme depth applications, please contact factory.		Form 7.3_29
Certificate of Conformance			
Certifies that a transducer shipped on an order was produced in accordance with and perform to contractually applicable government, customer and/or company specifications.	Certificate of Conformance		Form 7.3_24
Certificate of Calibration			
Certifies that a transducer shipped on an order was calibrated to measurement standards.	Certificate of Calibration		Form 7.3_25