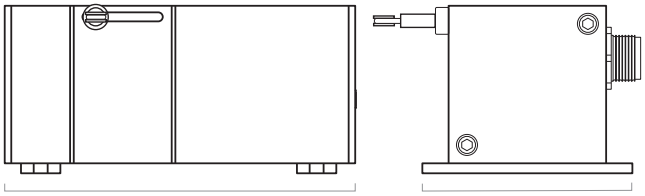
PT5DC

Industrial Grade • 0...5, 0...10 Vdc

Absolute Linear Position to 250 inches (6350 mm)
Hard Anodized Aluminum Enclosure
High Cycle Applications
IP67 • NEMA 6 Protection

CE





GENERAL

Full Stroke Range Options	0-10 to 0-250 inches
Output Signal Options	0...5, 0...10, -5...+5, -10...+10 VDC
Accuracy	± 0.75% to ±0.18% full stroke (see ordering information)
Repeatability	see ordering information
Resolution	essentially infinite
Measuring Cable Options	stainless steel or thermoplastic
Enclosure Material	hard anodized aluminum
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Maximum Measuring Cable Velocity	see ordering information
Maximum Retraction Acceleration	see ordering information
Weight	5 lbs. max.

ELECTRICAL

Input	14.5-40 VDC (10.5-40 VDC for 0...5 and -5...+5 volt output)
Input Current	10 mA maximum
Output Impedance	1000 ohms
Maximum Load	5000 ohms
Zero and Span Adjustment	see ordering information

ENVIRONMENTAL

Enclosure	NEMA 4/6, IP 65/67
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum


EMC COMPLIENCE PER DIRECTIVE 89/336/EEC

Emission/Immunity	EN50081-2 / EN50082-2

The PT5DC cable-extension transducer uses a unique thermoplastic cable that has virtually an infinite fatigue life. This cable, known as V62, has properties that are superior for high cycle and rugged applications.

Like our other other transducers, the PT5DC installs in minutes, functions properly without perfectly parallel alignment, and fits easily into small areas. The PT5DC offers additional installation flexibility since its cable exit can be rotated relative to the mounting surface, providing four different cable exit orientations.

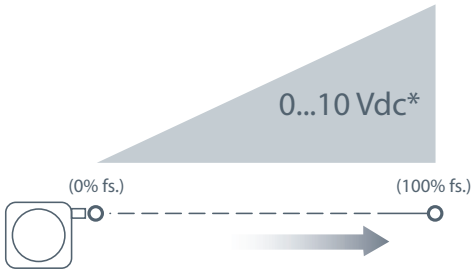Output Signal:




**Additional Output Options: 0...5, ⁻5...⁺5, ⁻10...⁺10 Vdc*


20630 Plummer Street • Chatsworth, CA 91311
tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

celesco

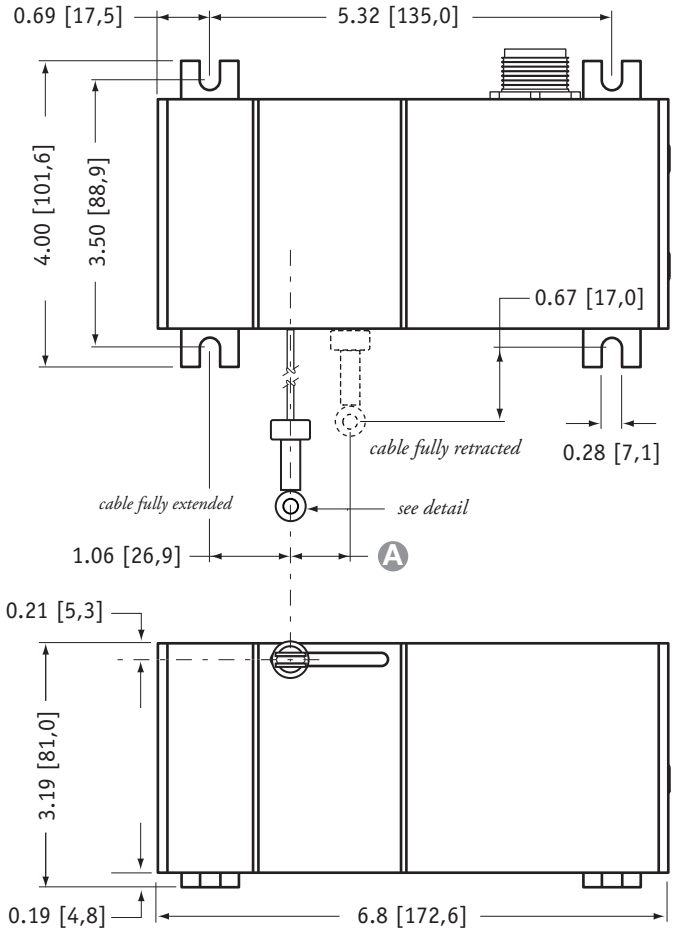Outline Drawing:




eyelet detail



A DIMENSION (inches[mm])

RANGE	N34 *measuring cable*	S47 & V62 *measuring cable*
10	0.05 [1,2]	0.08 [2,0]
15	0.07 [1,8]	0.12 [3,0]
20	0.09 [2,4]	0.16 [3,9]
30	0.14 [3,5]	0.23 [5,9]
40	0.19 [4,7]	0.31 [7,9]
50	0.23 [5,9]	0.39 [9,9]
60	0.28 [7,0]	0.47 [11,8]
80	0.37 [9,4]	0.62 [15,8]
100	0.46 [11,7]	0.78 [19,7]
125	0.58 [14,7]	0.97 [24,7]
150	0.69 [17,6]	1.16 [29,6]
200	0.92 [23,5]	n/a
250	1.16 [29,3]	n/a

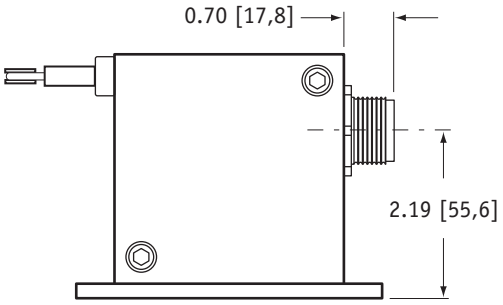

DIMENSIONS ARE IN INCHES [MM]
tolerances are 0.03 IN. [0.5 MM] unless otherwise noted.

* tolerance = +.005 –.001 [+.13 –.03]
** tolerance = +.005 –.005 [+.13 –.13]

Ordering Information:

Model Number:

PT5DC - _____ - ___ - ___ - ___ - ___
order code: Ⓡ Ⓐ Ⓑ Ⓒ Ⓓ

Sample Model Number:

PT5DC - 100 - N34 - FR - Z10 - M6

Ⓡ	range:	100 inches
Ⓐ	measuring cable:	.034 nylon-coated stainless
Ⓑ	cable exit:	front
Ⓒ	output signal:	0...10 vdc
Ⓓ	electrical connection:	6-pin plastic connector




Full Stroke Range:

Ⓡ *order code:*	10	15	20	25	30	40	50	60	80	100	125	150	200	250
full stroke range, min:	10 in.	15 in.	20 in.	25 in.	30 in.	40 in.	50 in.	60 in.	80 in.	100 in.	125 in.	150 in.	200 in.	250 in.
accuracy (±% of f.s.):	.75%	.6%	.5%	.5%	.5%	.3%	.3%	.25%	.25%	.25%	.25%	.18%	.18%	.18%
repeatability (±% of f.s.):	.1%	.1%	.05%	.05%	.05%	.05%	.05%	.02%	.02%	.02%	.02%	.02%	.02%	.02%
potentiometer cycle life:	2,500,000 cycles					500,000 cycles						250,000 cycles		
cable tension (20%):	41 ounces												21 ounces	
max. cable velocity/acceleration:	300 in./sec • 5 g												120 in./sec • 2 g	

Ordering Information (cont.):





Measuring Cable:

Ⓐ order code:

N34	S47	V62
.034 nylon-coated stainless steel *available in all ranges*	.047 stainless steel *all ranges up to 150 inches*	.062 thermoplastic *all ranges up to 150 inches*
		

Cable Exit:

Ⓑ order code:

UP	DN	FR	BK
up	down	front	back
			

inches [mm]

Output Sianals:

Ⓒ order code:

	Z10	10Z	Z5	5Z	M0P0	P0M0	M5P5	P5M5
output signal options:	0...10 VDC	10...0 VDC	0...5 VDC	5...0 VDC	-10...+10 VDC	+10...-10 VDC	-5...+5 VDC	+5...-5 VDC
								
input voltage:	14.5 – 40 vdc		10.5 – 40 vdc		14.5 – 40 vdc		10.5 – 40 vdc	
span adjustment:	to 50% of factory set span				to 75% of factory set span			
zero adjustment:	from factory set zero to 50% of full stroke range				from factory set zero to 25% of full stroke range			

example:





ordercode = **Z10** = 0...10 VDC

0 vdc = 

10 vdc = 

Electrical Connection:

Ⓓ order code:

M6	M6M	MC4	C25
6-pin plastic connector with mating plug **IP 67, NEMA 6**	6-pin metal connector with mating plug **IP 65, NEMA 4**	4-pin micro-connector with 12 ft [3.5 M] cord set **IP 67, NEMA 6**	25-ft. instrumentation cable 24 AWG, shielded **IP 67, NEMA 6**
			
.30 – .39 in. [8 – 10 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	.375 in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	12 ft. x 5/16-in. dia. [3,5 M x 8 mm dia.] yellow PVC jacket shielded, 22 AWG	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded

6-pin mating plug:



contact view

pin	signals
A	input voltage
B	output signal
C	common

4-pin mating plug and cord set:




contact view

pin	color code	signals
1	RED-BLK TR.	input voltage
2	RED-WHT TR.	output signal
3	RED	common

25-ft. cable:


color code	standard
RED	input voltage
BLACK	common
GREEN	output signal

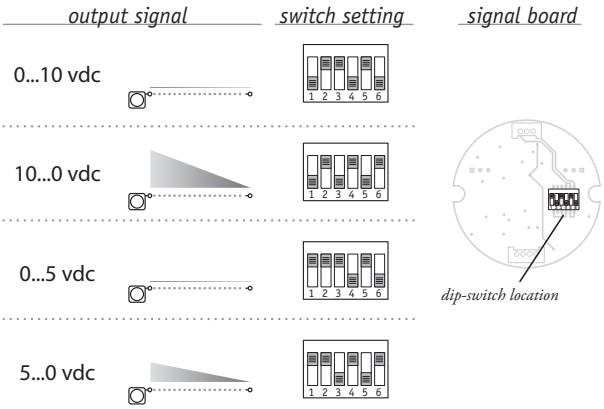Output Signal Selection (does not apply to -5...+5 & -10...+10 vdc options)



The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

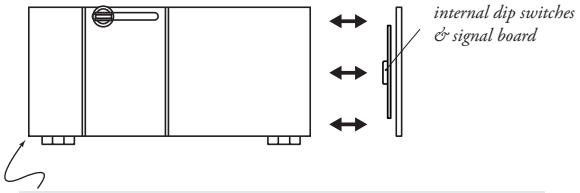To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.



Caution! Do Not Remove Spring-Side End Cover

Removing spring-side end cover could cause spring to become unseated and permanently damaged.