
RT9420


0–90° to 0–50 Turns • 0..20mA • 4..20mA

Industrial Grade Rotational Position Sensor
Absolute Rotary Position up to 50 turns
Aluminum or Stainless Steel Enclosure Options
IP68 / NEMA 6 • Hazardous Area Certification





4.5" [114 mm]



2.4" [59 mm]

GENERAL

Full Stroke Range Options	0-0.25 to 0-50 turns
Output Signal Options	4...20 mA (2-wire) and 0...20 mA (3-wire)
Accuracy	see ordering information
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Enclosure Material Options	powder-painted aluminum or stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Shaft Loading	up to 35 lbs. radial and 5 lbs. axial
Weight, Aluminum (Stainless Steel) Enclosure	5 lbs. (10 lbs.) max.

ELECTRICAL

Input Voltage	see ordering information
Input Current	20 mA max.
Maximum Loop Resitance (Load)	(loop supply voltage - 8)/0.020
Circuit Protection	38 mA max.
Impedence	100M ohms@100 VDC, min.
Output Signal Adjustment	
Zero Adjustment	from factory set zero to 50% of full stroke range
Span Adjustment	to 50% of factory set span
Thermal Effects, Zero	0.01% f.s./°F, max.
Thermal Effects, Span	0.01% f.s./°F, max.

EMC COMPLIENCE PER DIRECTIVE 89/336/EEC

Emission/Immunity	EN50081-2/EN50082-2


ENVIRONMENTAL

Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

The RT9420 provides rotational position feedback via 4...20 mA current loop signal. This device combines the superb linearity and resolution of a plastic-hybrid potentiometer and the durability of Celesco's 4...20mA circuit to provide an accurate and reliable electrical signal. Additionally the zero and span settings are adjustable through access holes in the housing.

This innovative sensor from Celesco, designed to meet NEMA-4 and IP67 standards, is available in full stroke ranges of 1/4 to 50 turns.


Output Signal:

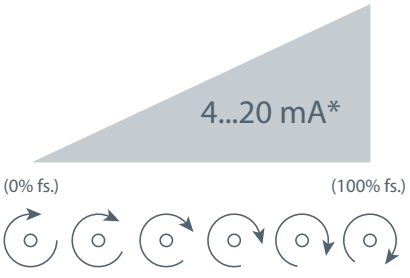


**Optional 3-wire, 0...20mA output signal available.*

20630 Plummer Street • Chatsworth, CA 91311
tel: 800.423.5483 • +1.818.701.2750 • fax: +1.818.701.2799

Outline Drawing:

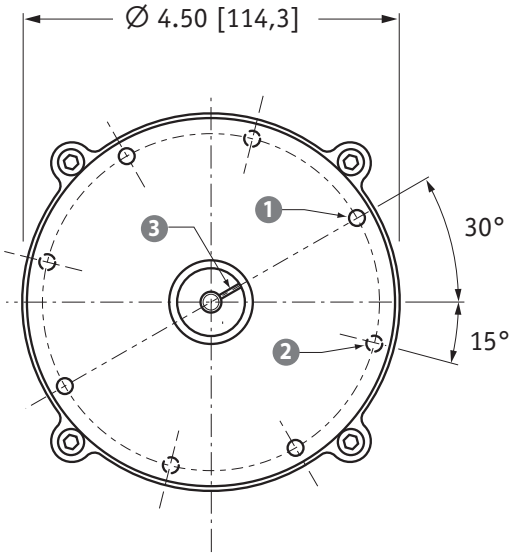

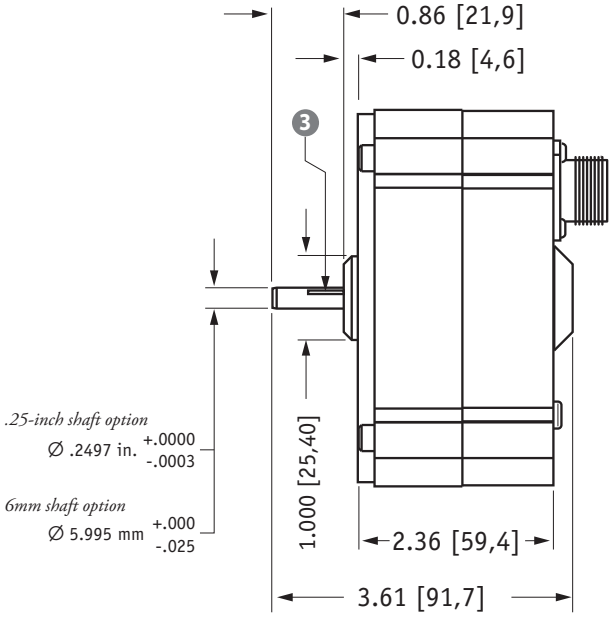

1. *mounting holes for .25-inch shaft diameter option*
   #8-32 x 0.180 @ 90° apart on a 4.15 in. dia. BC (4 places)
2. *mounting holes for 6-mm shaft diameter option*
   M4 x 4,5 mm @ 90° apart on a 105,4 mm dia. BC (4 places)
3. *reference mark*
   full counter-clockwise position - align mark on shaft to mark on face for start of measurement range

DIMENSIONS ARE IN INCHES [MM]
tolerances are ±0.02 in. [±0,5 mm] unless otherwise noted

Ordering Information:

Model Number:

RT9420- _____ **-** ___ ___ **1** **-** **1** ___ ___ **0**
order code: Ⓡ Ⓐ Ⓑ Ⓒ Ⓓ Ⓔ Ⓕ Ⓖ

Sample Model Number:

RT9420 - 0005 - 111 - 1110

Ⓡ	range:	5 turns (clockwise shaft rotations)
Ⓐ	enclosure:	aluminum
Ⓑ	shaft diameter:	.25 inches
Ⓔ	output signal:	4...20 mA signal increasing clockwise
Ⓕ	electrical connection:	6-pin plastic connector

Full Stroke Range:

Ⓡ *order code:*	R125	0R25	0R50	0001	0002	0003	0005	0010	0020	0030	0050
clockwise shaft rotations, min:	0.125	0.25	0.50	1	2	3	5	10	20	30	50
accuracy (% of f.s.):	0.3%	0.3%	0.3%	0.3%	0.3%	0.3%	0.2%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5


**–number of times the sensor shaft can be cycled back and forth from beginning to end and back to the beginning before any measurable signal degradation may occur.*

Enclosure Material:

Ⓐ *order code:*	1	2
	powder-painted aluminum	303 stainless steel

Shaft Diameter:

Ⓑ *order code:*	1	2	3	4
	0.25-in. diameter	6 mm diameter	0.25-in. dia. w/flats	6 mm dia. w/flats



Ordering Information (cont.):

Output Signals:

order code:	1	2	3	4	5*	6*
output signal options:	4...20 mA	20...4 mA	0...20 mA	20...0 mA	4...20 mA	20...4 mA
	4 → 20, ccw / cw	20 → 4, ccw / cw	0 → 20, ccw / cw	20 → 0, ccw / cw	4 → 20, ccw / cw	20 → 4, ccw / cw
sensitivity:	16 mA/full stroke ±0.25%		20 mA/full stroke ±0.25%		16 mA/full stroke ±0.25%	
wiring configuration:	2 – wire		3 – wire		2 – wire	
input voltage:	8 – 34 vdc		14 – 29 vdc		14 – 32 vdc	
hazardous area certification:	not certified				CSA • Cenelec	

Example:

ordercode = **1** = 4...20 mA { max ccw = 4 mA; max cw = 20 mA

Hazardous Area Certifications:

CSA Standard 22.2 Class 1 Groups A, B, C and D


Cenelec LCIE EEx ia IIc T4

***IMPORTANT:** intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984*

Electrical Connection:

order code: **1**


6-pin plastic connector w/mating plug
IP 67, NEMA 4X,6**



1/2 - 5/16" [14 - 8 mm] cable dia.
16 AWG max conductor size
connector: MS3102E-14S-6P
mating plug: MS3106E-14S-6S

order code: **2**


10-ft. [3 M] waterproof cable
IP 67, NEMA 4X, 6**



10 ft. x 0.4-in. dia.
[3 M x 10 mm dia.]
18 AWG, type SJTW

order code: **3**


6-pin metal connector w/mating plug
IP 65, NEMA 4



3/8-in. [9 mm] max cable dia.
16 AWG max conductor size
connector: MS3102E-14S-6P
mating plug: MS3106E-14S-6S

order code: **4**


25-ft. [7.5 M] instrumentation cable
IP 67, NEMA 6



25 ft. x 0.2-in. dia.
[7,5 M x 5 mm dia.]
24 AWG, shielded

order code: **5**


100-ft. [30 M] waterproof cable
IP 67, NEMA 4X,6**



100 ft. x 0.4-in. dia.
[30 M x 10 mm dia.]
18 AWG, type SJTW

order code: **6**


10-ft. [3 M] **pressure tested*** waterproof cable
IP 68, NEMA 4X, 6P**



10 ft. x 0.4-in. dia.
[3 M x 10 mm dia.]
18 AWG, type SJTW

order code: **7**


100-ft. [30 M] **pressure tested*** waterproof cable
IP 68, NEMA 4X, 6P**



100 ft. x 0.4-in. dia.
[30 M x 10 mm dia.]
18 AWG, type SJTW

6-pin Mating Plug

pin	2-wire	3-wire
A	8...34 vdc***	14...29 vdc
B	4...20 mA out	common
C	–	0...20 mA out
D	case ground	–



contact view

Waterproof Cable

color code	2-wire	3-wire
WHITE	8...34 vdc***	14...29 vdc
BLACK	4...20 mA out	common
GREEN	case ground	0...20 mA out


Instrumentation Cable

color code	2-wire	3-wire
RED	8...34 vdc***	14...29 vdc
BLACK	4...20 mA out	common
WHITE	n/a	n/a
GREEN	case ground	0...20 mA out

Notes:
- * *–Test pressure: 100 feet [30 meters] H_2O (40 PSID); Test Medium: Air; Duration: 2 hours.*
- ** *–NEMA 4X applies to stainless steel enclosure only.*
- *** *–14-32 VDC for hazardous area option.*

Output Signal Selection:

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

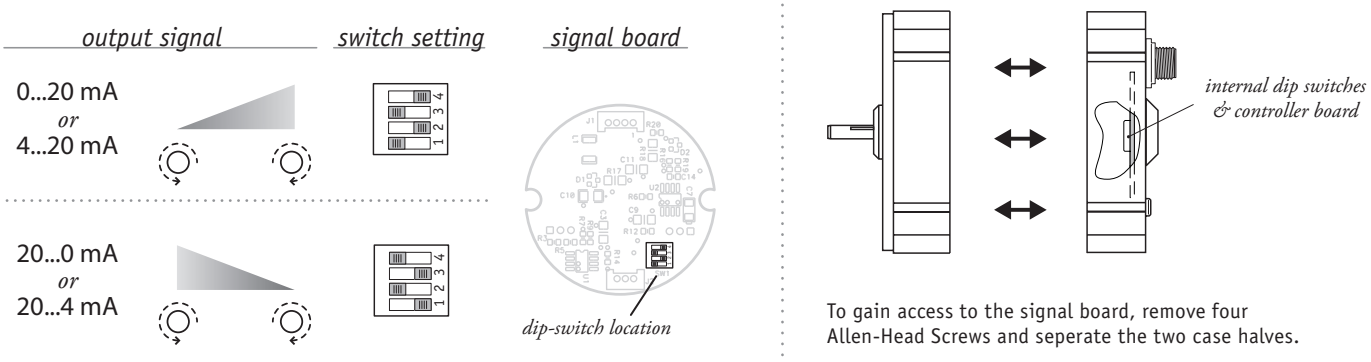

To gain access to the signal board, remove four Allen-Head Screws and seperate the two case halves.